

Picture coming soon

FEATURES:

- Ultra-Wide 4:1 input range
- Efficiency up to 90%
- Operating temperature -40°C to + 100°C
- Continuous Short Circuit Protection
- Over Current and Over Voltage Protection
- No minimum load required
- Remote on/off control
- Input / Output Isolation 3000VDC
- Voltage Adjustment
- Soft Start, UVLO

Models Single output



Model	Input Voltage (V)	Input Current NL FL (mA)	Output Voltage (V)	Output Current max (A)	Capacitive load (µF)	Efficiency (%)
AM15JW-2403SH30Z	9-36	10 509	3.3	3	3300	82
AM15JW-2405SH30Z	9-36	10 749	5	3	3300	85
AM15JW-2412SH30Z	9-36	10 735	12	1.25	680	88
AM15JW-2415SH30Z	9-36	10 718	15	1	470	89
AM15JW-4803SH30Z	18-75	10 255	3.3	3	3300	82
AM15JW-4805SH30Z	18-75	10 377	5	3	3300	85
AM15JW-4812SH30Z	18-75	10 368	12	1.25	680	87
AM15JW-4815SH30Z	18-75	10 363	15	1	470	88

Models Dual output

Model	Input Voltage (V)	Input Current NL FL (mA)	Output Voltage (V)	Output Current max (A)	Capacitive load (µF)	Efficiency (%)
AM15JW-2405DH30Z	9-36	10 753	±5	±1.5	±2200	85
AM15JW-2412DH30Z	9-36	10 723	±12	±0.625	±470	88
AM15JW-2415DH30Z	9-36	15 715	±15	±0.5	±330	89
AM15JW-4805DH30Z	18-75	8 372	±5	±1.5	±2200	88
AM15JW-4812DH30Z	18-75	8 359	±12	±0.625	±470	90
AM15JW-4815DH30Z	18-75	10 363	±15	±0.5	±330	88

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	24	9-36		VDC
	48	18-75		
Filter	π (Pi) Network			
Remote ON/OFF Control	ON	3~12 or open circuit		VDC
	OFF	0~1.2 or short circuit b/n pin 2 & 6, idle current 2mA		
Under Voltage Lockout	24, ON OFF	8.7 7.6		VDC
	48, ON OFF	17.5 16.5		
Startup time		30		ms
Absolute Maximum Rating	24 Vin		50	VDC
	48 Vin		100	
Peak Input Voltage time		100		ms
Input Reflected Ripple Current		20		mA p-p
Transient recovery time	25% load step	250		µs
Transient Response Deviation	25% load step		±5	%

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	60 sec		3000	VDC
Case/ Input & Output			1600	VDC
Resistance		> 1000		MOhm

Capacitance		2000		pF
-------------	--	------	--	----

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±1		%
Cross regulation (Dual Output)	25% - 100% load on one output, 100% load on the second	±5		%
Line voltage regulation	HL-LL		±0.5	%
Load voltage regulation (Single)	0-100% load		±0.5	%
Load voltage regulation (Dual)	0-100% load, balanced load		±1.0	%
Short Circuit protection		Continuous, auto-recovery		
Over Voltage Protection		140		% of Vout
Over Current Protection		170		% of Iout max
Temperature coefficient		±0.02		%/°C
Ripple & Noise*	At 20Mhz bandwidth	75		mV p-p
Voltage Adjustment	Single output only		±10	% of Vout

*Measured with 10µF/25V MLCC on each output.

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load, 3.3V and 5V output	270		KHz
	100% load, others	330		
Operating temperature	See Derating curve	-40 to +100		°C
Storage temperature		-55 to +125		°C
Maximum Case temperature			105	°C
Cooling		Free air convection (30-65 LFM)		
Humidity			95	%
Case material		Copper		
Weight		29		g
Dimensions (L x W x H)	Tolerance ±0.5mm	1.60 x 1.00 x 0.41 inches	40.64 x 25.40 x 10.41 mm	
MTBF		>600 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)		

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.


Safety Specifications

Standards	
Standards	Designed to meet IEC/EN60950-1 & IEC/EN62368-1
	EN55032 Class A, EN55024
	IEC61000-4-2, Perf. Criteria B
	IEC61000-4-3, Perf. Criteria A
	IEC61000-4-4, Perf. Criteria A, with the recommended EMC circuit
	IEC61000-4-5, Perf. Criteria A, with the recommended EMC circuit
	IEC61000-4-6, Perf. Criteria A
	IEC61000-4-8, Perf. Criteria A

Pin Out Specifications


Pin	Single	Dual
1	+V Input	+V Input
2	-V Input	-V Input
3	On/Off Control	On/Off Control
4	+V Output	+V Output
5	Trim	Common
6	-V Output	-V Output

Input Reflected Ripple Test Circuit

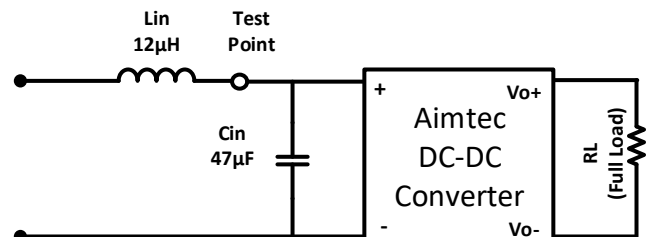


* Tested at full load, and nominal input


Dimensions

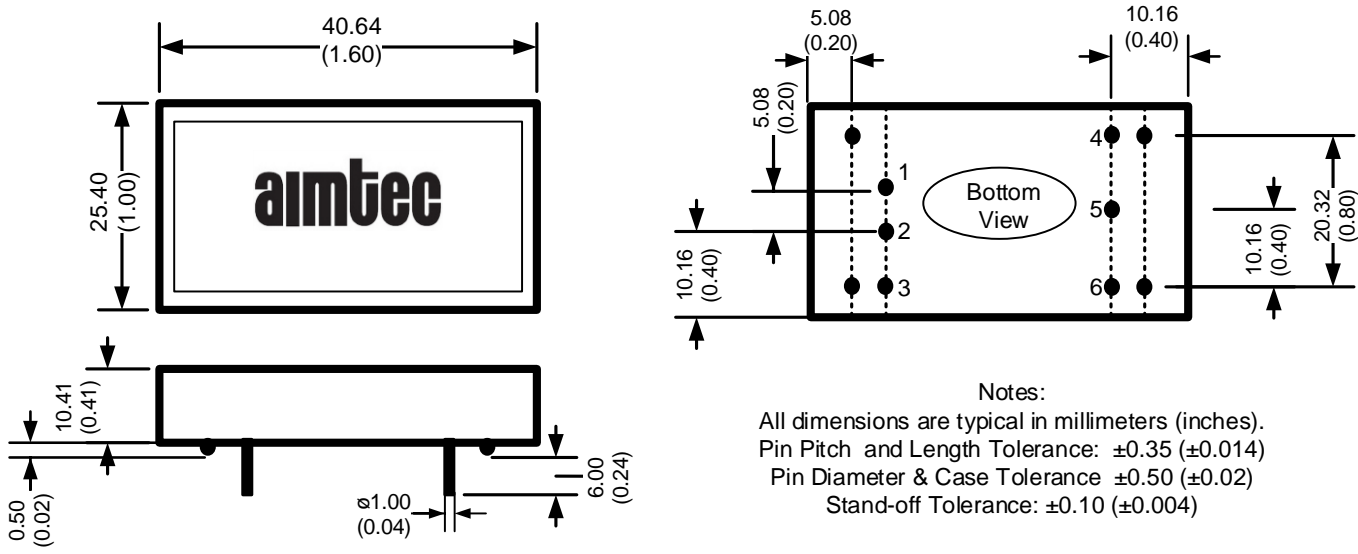

Derating

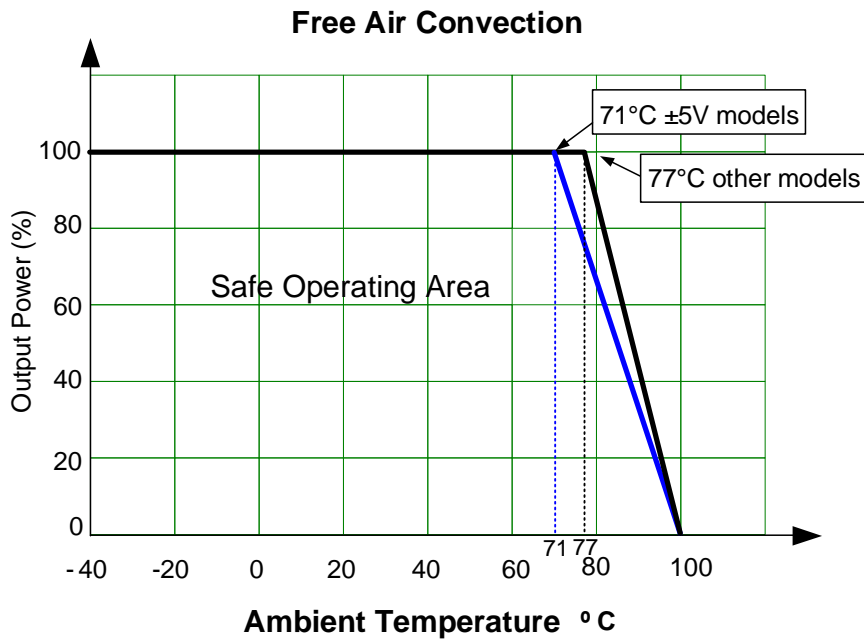


Recommended EMC circuit

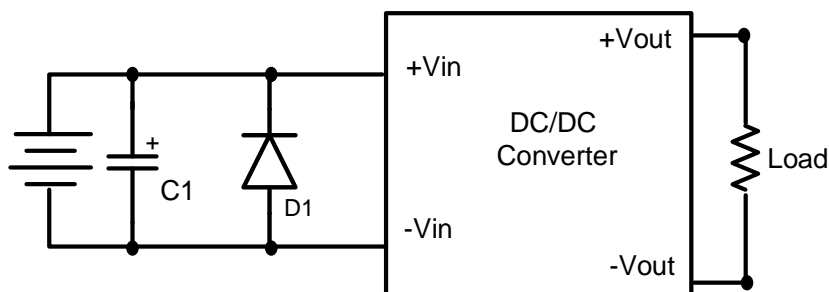

Input Voltage	C1	D1
24V	330 μ F/100V	58V, 3KW peak pulse power
48V		120V, 3KW peak pulse power

On/Off Control

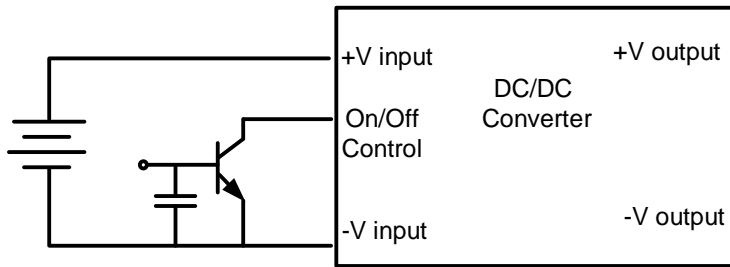

Positive logic turns on the module during high logic and off during low logic.

Module can be controlled by an external switch between the On/Off CTRL terminal and -V input terminal. The switch can be either open collector or open drain.

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.